



Accessories

1. Receiver (Master)
2. Sensor (Slaver)
3. Batteries
4. Power Adaptor
5. Connection wire
6. PC Connection wire
7. Carrying Case and Belt

No.	Item	Description
1	Operation Range	-10° ~ +10°
2	Axis	X axis, Y axis
3	Resolution	0.002°, 0.01°, 0.1°, 1°
4	Repeatability	< 0.005°X (2σ)
5	Absolute Accuracy (25°C)	< 0.01°(±3°), < 0.04°(±10°)
6	Temperature Drifting	< 1" / °C (0°), < 1.5" / °C (±3°)
7	Response Time	< 2S
8	Operation Temperature	-10°C ~ +50°C
9	Storage Temperature	-20°C ~ +60°C
10	Weight	< 300g (including AA battery * 3)
11	Dimension	70*24*134mm (Receiver)
12	Power Supply	Master (Receiver): AA Battery * 3 Slave (Sensor): DC 5V or AA Battery * 3
13	Range for Bluetooth	10m
14	Battery Life	Receiver > 8h, Sensor > 8h
15	Safety Instructions	RoHS Compliance EU Instruction 91/338/EEC EU Instruction 94/62/EC WEEE for EU/EG/EE Chinese RoHS. EMC for Receiver and Sensor CE / EMI: EN61000-6-3/2007, EN55022/2006 Group1 Class B EMS: EN61000-6-2/2005, IEC61000-4-2/2001 (static electricity) IEC61000-4-3/2006 (Radiation of electromagnetism) IEC61000-4-4/2004 (Burst) IEC61000-4-6/2006 (Conducted Immunity) IEC61000-4-8/2001 (Magnetic field), FCC Part15-C Class A /2007



UPBEAT TECHNOLOGIES

No.27/4, First Floor, GOLF Arcade
Veterinary Hospital Road ,Fanepet,
Nandanam Chennai - 600 035.India.
Mob: +91 99625 34747
E-mail: info@upbeattech.com

www.upbeattech.com

Wireless Digital Level
Behold the Power of wireless



CA200



CA200 Wireless Electric Level

1. Power button
2. Enable Measure
3. Resolution and Degree select
4. Slope / Pythagoras / Channel Selector
5. Absolute, Opposite and Degree Alert Setting.
6. Lock and Quiet
7. Axis / Backlight Select / Enable calibration mode
8. Power Indicator
9. Data transfer Indicator
10. Scanning Indicator
11. Pairing Indicator
12. Power button
13. Power adaptor
14. Communication port for PC
15. Communication port for Master



Master(Receiver)



Sensor(Slaver) Bluetooth Leveler


Extendable usage with accessories

CA200 has two accessories (optional), One is handheld mount for machine install. The other is bracket for H steel installation and monitor. We believe when you work with them you will be surprised by the how efficient you've never thought.



Highly accuracy and easy maintain

Do not say it is troublesome anymore. CA200 has a highly accuracy (0.005°) with G-sensor technology embedded, it provide a better reliability than mechanical and CA200 is easy to maintain by your self, just with a 180 degree turning, you could maintain your CA200 as an expert.

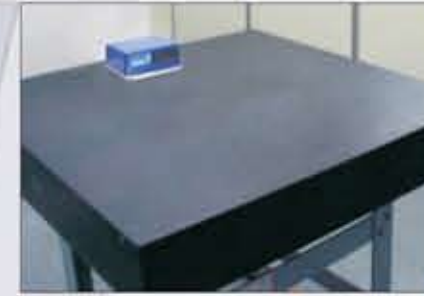

Sensor(Slaver) Bluetooth Leveler

0.005°

10M

Behold the power of Wireless

CA200 is the first electric level with wireless design which could help you to measure without any dragging. With blue tooth 2.0 supported CA200 could be operated in 10 meter far. Needing a level with no wired? Try CA200 you will know this is what you really need.

Complete function, design for heavy duty

CA200 is not only measure level for you, it could also being a level monitor - try Smart alert, set your prefer degree and put CA200 on location you need. Do not be worried, CA200 will let you know on time, when you over leveled.

Graphical LCD display, minimum resolution is 0.002

CA200 has multiple display selection for you, you could choose whatever you need. With digital, graphical interface design, you could read results clear and easily.

Master(Receiver)

